

TATA MOTORS




PRIMA

LX 4923.S

Powered for superior performance, higher earnings



PRIMA
The way the world trucks
Trucks | Tractor-Trailers | Tippers

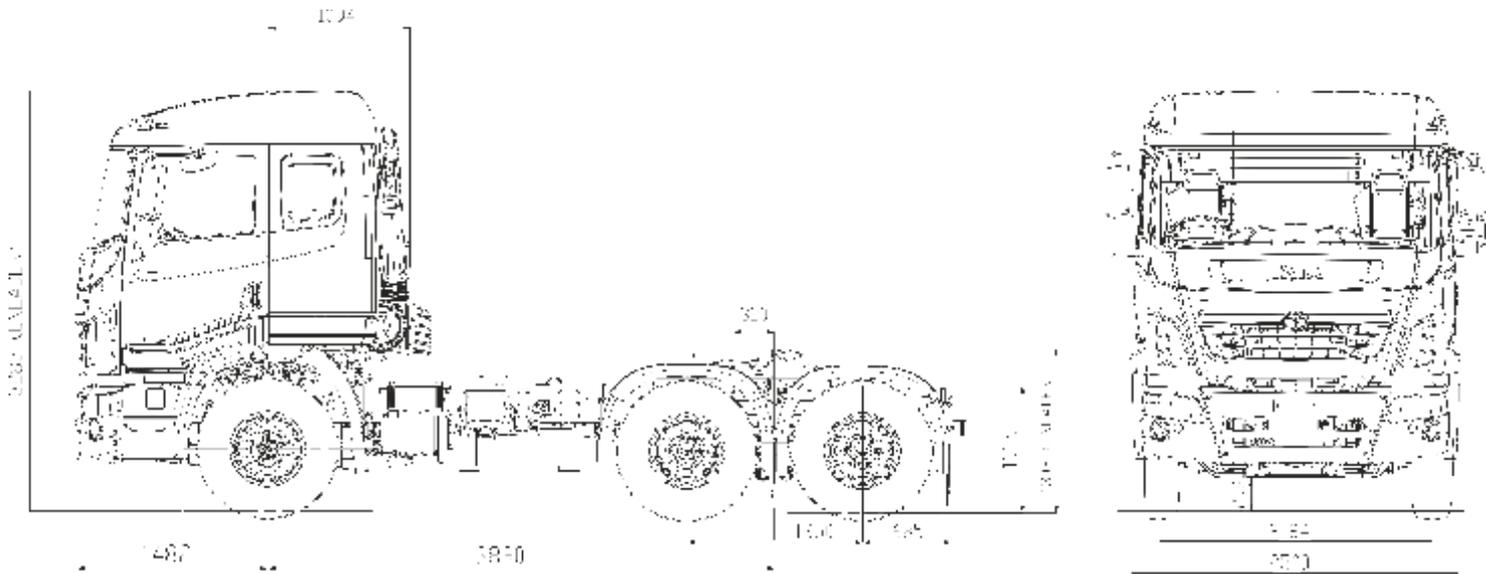

All dimensions in mm

Engine

Model	Cummins ISBe 230 BSIII
Type	Water-cooled Direct Injection Turbo-charged, After-cooled Diesel Engine; 6 Inline
Other Details	Bore / Stroke: 107 mm x 124 mm Firing Order: 1-5-3-6-2-4 Air Filter: Dry type remote mounted Oil Filter: Full flow spin on paper type Fuel Filter: Pre and fine filtration with Water Separator
Volume	6700 cc
Power	227 HP @ 2500 rpm
Torque	900 Nm @ 1200-1700 rpm
FIP	HPCR

Cabin & Steering System

Type	Fully Floating Sleeper Cabin Hydraulic Tilt Type
Steering	Tilt and Telescopic Adjustable Stg. Wheel Dia 470 mm Integral Hydraulic Power-assisted, Ratio: 24.2
Instrument Cluster	Digital
AC	Optional

Tyres

Tyres	10R20-16PR
-------	------------

Fuel Tank (Itrs)

Fuel Tank	400
-----------	-----

Performance

Max. Geared Speed in Top Gear (kmph)	96
Max. Gradeability in Crawler Gear	20.12%

Telematics / GPS Tracking

Telematics unit as standard fitment
Service activation optional (Contact 1800 209 7979)

Dimensions (mm)

Overall Width	2585
Overall Length	6827
Wheelbase	3890
Front Overhang	1482
Turning Circle Diameter	14220

Weight (kg)

Unladen Weight	8720
Max. GCW	49000
Max. FAW	6000
Max. RAW	19000

Gearbox & Clutch

Model	G1150 OD 9-speed Synchromesh on all forward speeds, Constant mesh on reverse
Speed	8F+1 Cr+1R
Gear Ratios	Crawler - 9.37 1st - 6.654, 2nd - 4.897 3rd - 3.571, 4th - 2.69 5th - 1.863, 6th - 1.370 7th - 1.0, 8th - 0.75, Rev - 9.757
Clutch Type	Single Disc, Dry Friction Type
Clutch Dia	430 mm Push Type, Area - 1984 sq cm

Rear Drive Axle

Type	Tata RA 109 SRT
Axle Ratio	6.83

Chassis & Suspension

Size	286 x 90 x 7
Type	Fully reinforced
Front Suspension	Parabolic Leaf 90 mm Width
Rear Suspension	Inverted Bogie Suspension

Brake

Type	Full Air S - Cam Dual Circuit with ABS
------	--